


MATERIAL SPECIFICATIONS

Reverberation time field test (Currie Hall University of W.A)

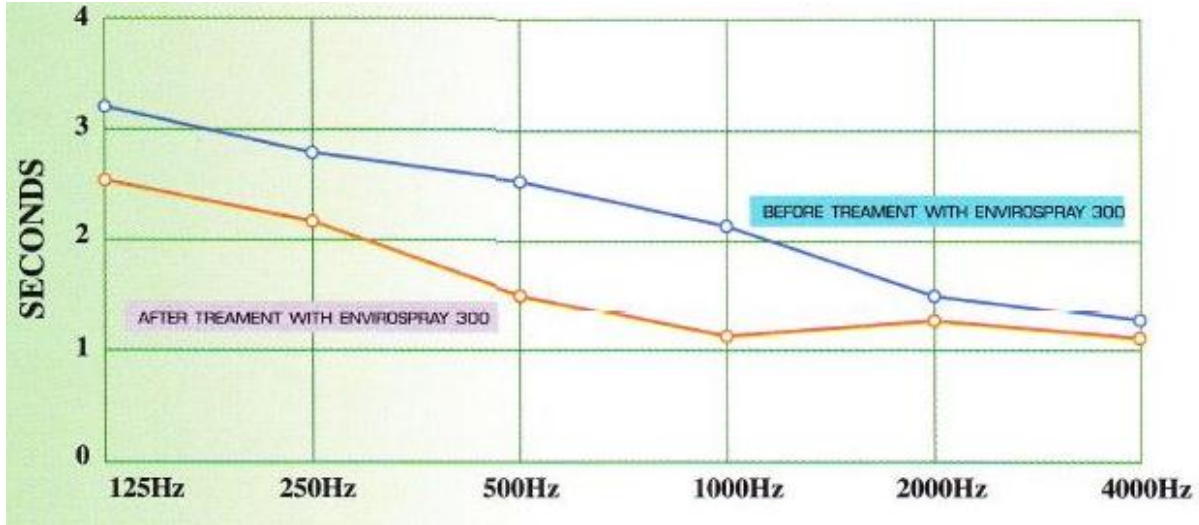

Sound Absorption Tests Applied To Solid Backing

Thickness	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	NRC
20 mm	.07	.20	.53	.83	.89	.94	.60
25 mm	.10	.29	.72	.98	1.01	.98	.75
40 mm	.15	.45	.80	.90	.95	1.00	.90

Note : Low Frequency Absorption Improves with Thickness of Application

Source : 2422 CCS

Complies to : ATM C 423

PERFORMANCE :

K Value : 0.029 W/MK

R Value : 0.862 (at 25mm) 4.89 BTU/ft²h°f

Density : 70 kg/m³

NRC Value : 25mm = 0.75 or 75%

(Sound Absorption)